


2022

DELTA PRESSURIZED WATER LEAK DETECTION



TRIDENT PRESSURIZED
WATER LEAK DETECTION

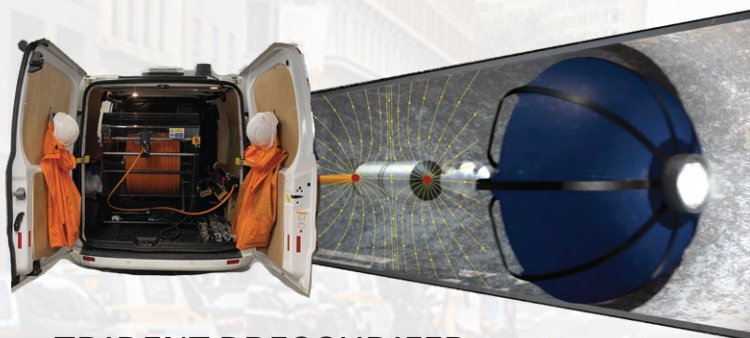

ES-600 SEWER
PORTABLE



ES-600 SEWER



OUR QUALITY STANDARDS AND YEARS OF SERVICE CONTINUE TO OFFER
SOME OF THE MOST TALENTED FIELD AND TECHNICAL PERSONNEL IN THE INDUSTRY.

AWARDS

2022

Edie Sustainability Award: Product Innovation of the Year - Finalist
(Winner unannounced at time of print)

Winner of Builtworlds Venture West Demo Days

2021

IoT Breakthrough Awards: Leak Detection Solution of the Year

Petronas: Technology Challenge 15 Winner
(Inspection Technique of Non-Metallic Underground Piping)

2016

Sacramento Region Innovations Award - Finalist

2015

NASTT: Joseph L Abbott Jr Award for Product Innovation

UKSTT: Best Project Award for Small Scheme

AEI: American Leadership Award

2014

Green Tec Awards: Water & Sewerage - Finalist

2013

The New Economy Clean Tech Awards: Best Water & Wastewater Solutions

South West Water: PURE Award for Innovation

WEF: Innovative Technology Award

NASTT: Joseph L Abbott Jr Award for Product Innovation

Sierra Nevada Innovation: CleanTech Award



PETRONAS: TECHNOLOGY CHALLENGE 15 WINNER



LEAK DETECTION SOLUTION OF THE YEAR



BEST WATER & WASTEWATER SOLUTIONS

TABLE OF CONTENTS

Product Overview	1
Multi-Sensor DELTA Probe for Pressurized Pipes	9
Multi-Sensor TRIDENT Probe for Pressurized Pipes.....	13
ES-600 Series CCTV Truck Integration, including ES-670, ES-660, ES-650, and ES-400	19
ES-600 Series Portable, including ES-670, ES-660, ES-650, and ES-400	21
ES-400 Push Reel	22
ES-200 Push Reel	23
Plumber's Water & Sewer Leak Detection	25
Services	30



INTERNATIONAL PATENTS & PATENTS PENDING



CA 2864503, CA 2874808, CA 2905492, EP 2748576, JP 6062541, JP 6193893, NZ 713053,
US Patents: 9143740, 9304055, 9933329, 10451515, 10557772, 10816431

PRODUCT OVERVIEW

Product	Number	Selected Application	Sales / Licensing ¹
	DELTA Multi-Sensor Probe	Small-to-Medium Pressurised Water Mains or Sewer Rising Mains up to 60 inches (1500mm). Up to 3,300 ft (1km) per survey, or 6,600 ft (2km) with special upgrades.	Only available for service-related projects. Not for sale to utility customers or contractors. Contractor licensing subject to training, qualifications, and annual support agreement.
	TRIDENT Multi-Sensor Probe - American Version - British Version	Small-to-Medium Pressurised Water Mains or Sewer Rising Mains, up to 60 inches (1500mm). Up to 240m per survey (120m in a single direction).	Available for sale to municipal or investor-owned utilities. Available for licensing to contractors on a daily or per meter basis.
	ES-600 CCTV Optional: ES-670, ES-660, ES-650 ES-400	Medium-to-Large diameter Sewer or Stormwater Pipes, or Gravity Water Mains 6-72 inches (150-1800mm). Rack-mounted onto an existing CCTV truck or van. 1,500ft (460m) range.	Available for sale to municipal or investor-owned utilities. Available for licensing to contractors on a daily or per meter basis.
	ES-600 Portable Optional: ES-670, ES-660, ES-650 ES-400	Medium-to-Large diameter Sewer or Stormwater Pipes, or Gravity Water Mains 6-72 inches (150-1800mm) that are difficult to access by vehicle. 1,000ft (305m) range.	Available for sale to municipal or investor-owned utilities. Available for licensing to contractors on a daily or per meter basis.
	ES-400 Push Rod Optional: Plug Reel, Hand Cart ES-200, ES-50	Small-to-Medium diameter Sewer or Stormwater Pipes 4-24 inches (150-600mm). Push rod length is limited to approximately 490 ft (150m).	Available for sale to municipal or investor-owned utilities. Available for licensing to contractors on a daily or per meter basis.
	ES-200 Push Rod Optional: Plug Reel, Hand Cart ES-50	Small diameter Sewer or Stormwater Pipes 3-8 inches (76-150mm). Best for private laterals. Push rod length is limited to approximately 490 ft (150m).	Available for sale to municipal or investor-owned utilities. Available for licensing to contractors on a daily or per meter basis.
	ES-25 & 50 Push Rod Optional: Plug Reel, Hand Cart	Very small diameter Plumbing Fixtures or Industrial Tubing 0.5-4 inches (25-100mm).	Scheduled for release in Second Quarter 2022.
	Swordfish	Very small diameter water pipes 0.5-3 inches (13-80mm). Combined lead and leak detection	Available for sale to utilities and plumbers. Available for licensing to contractors on a daily or per meter basis.
	CriticalH₂O® Cloud App	Web-based data management & storage, including SQL database for storing real-time inspection results for Low Voltage Conductivity, Acoustic, and CCTV surveys.	Requires set-up fee, per seat licensing, and minimum 2-year software support agreement.
	CriticalSewers® Cloud App	Web-based data management & storage, including SQL database for storing real-time inspection results for Low Voltage Conductivity.	Requires set-up fee, per seat licensing, and minimum 2-year software support agreement.

1. All products are available for international projects, and require detailed maps and a project plan addressing permitting, traffic control, and pipe access.

How Leaks Are Found & Measured in GPM

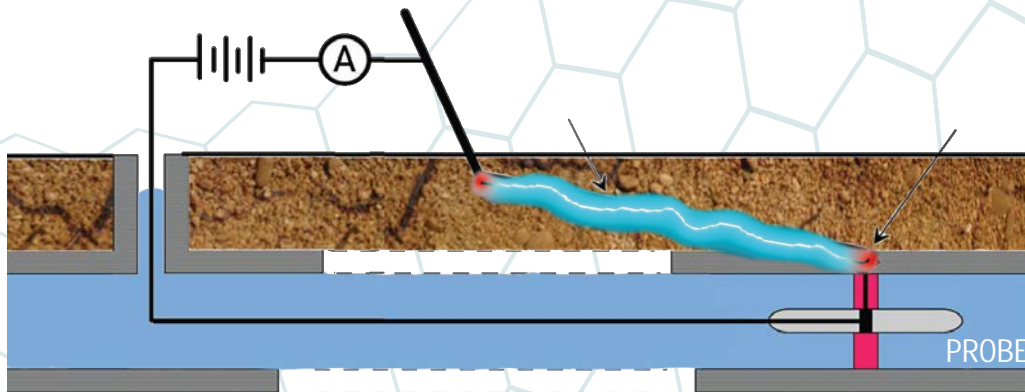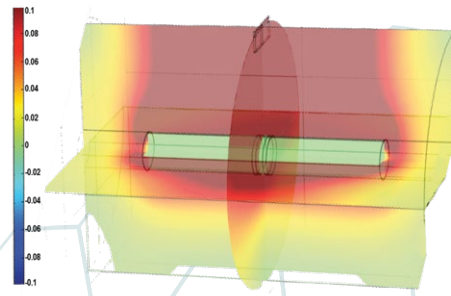


- Machine-Based Leak Location.
- Measures the Size of Hole by Focused Electric Current.
- Machine-Based Leak Quantification in GPM or LPS.
- As Featured in AWWA M77, ASTM F2550, JACSOMA #7

± 0.4 INCH ACCURACY
REPEATABLE RESULTS







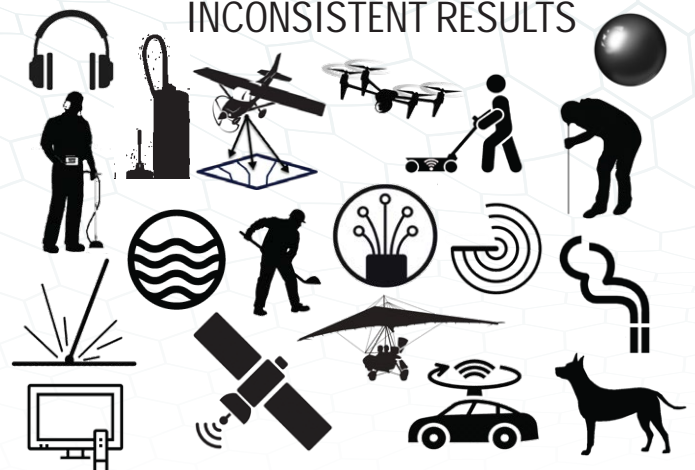




 NO GPM 

QUESTIONABLE ACCURACY
INCONSISTENT RESULTS



COMPETITIVE ADVANTAGES

Company	YES <input checked="" type="checkbox"/>	NO <input type="checkbox"/>	electro ^{scan} inc.	Aquam	Xylem/Pure/WRc	Aganova	Ingu	Utilis
Features / Product	Delta	Trident	JD7	Sahara	SmartBall®	Nautilus	Recon	Satellite
Technology	Acoustic, CCTV, Conductivity	CCTV, Conductivity	Acoustic, CCTV	Acoustic, CCTV	Acoustic	Acoustic	Acoustic	Synthetic Aperture Radar
In-Pipe Connection	Tethered	Tethered	Tethered	Tethered	Free Flowing	Free Flowing	Free Flowing	
Device								
Visual Inspection with Camera	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Joint Spacing	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Leak Location – Accuracy 1cm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Leakage Severity – Expressed in Gallons per Minute or Litres per Second	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Finds & Measures Leaks in Plastic Pipe	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pressurised Water & Gravity Sewers	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Wall Thickness for Cement Asbestos	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Able to Find Leaks With 'NO FLOW'	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Repeatability of Leak Location +2years	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

KEY ADVANTAGES

- No Lost Balls or Spheres. **100% Retrieval Since We're Tethered.**
- No False-Positives from 'Hitting' the Pipe Wall like Acoustic. **Not Possible With Ohm's Law.**
- No Missed Leaks. **We Find Them All.**
- No Guessing 'Which Leak is Larger?' **Each Has a Liters per Second or GPM.**
- No High Pressure Needed. **We're Pressure-Independent; Able to Scan 0-175 psi (12 bar).**
- No Long Wait for Reports. **Data is Available in Minutes!**
- No Estimated Locations or Ranges. **Pinpoint Locational Accuracy of 1cm (0.4in).**
- No Late Night / Early Morning Testing. **Ambient Noise & Customer Pipe Usage Is Not a Factor.**
- No Effect from High Groundwater Surrounding Pipes. **Electro Scan Measures Size of Hole.**
- No Need to Increase Pipe Pressure to Hear Leak. **Electro Scan Is Non-Acoustic.**



SURVEY REPEATABILITY

1. Low Accuracy
Low Repeatability



ACOUSTIC

2. Low Accuracy
High Repeatability



SATELLITE

3. Medium Accuracy
Low Repeatability




FIBER OPTIC


4. High Accuracy
High Repeatability



CONDUCTIVITY

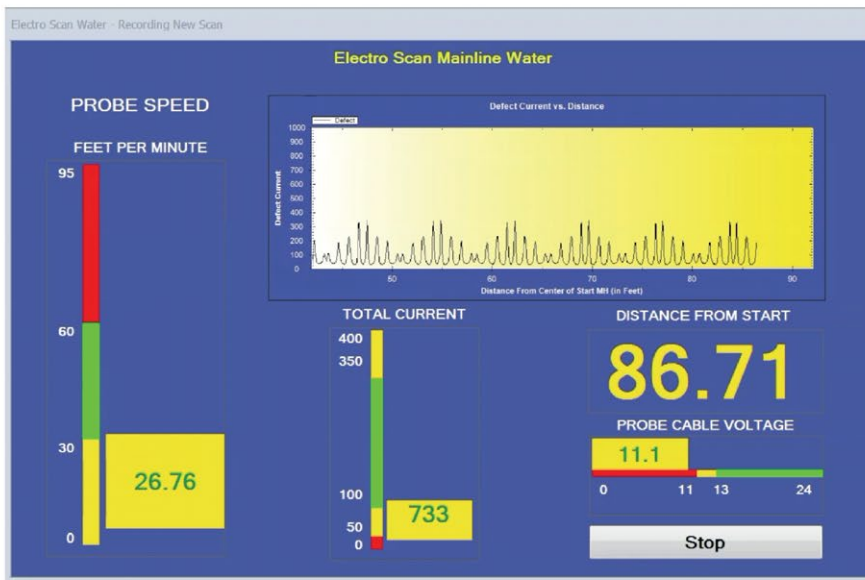

Conductivity Benchmark Testing

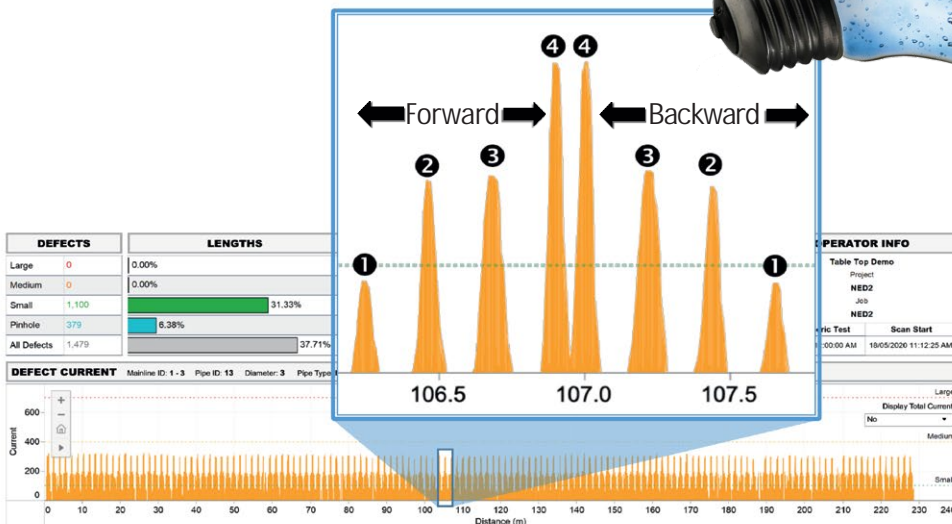

PIPE MATERIALS

ABS
 ACP
 BRK
 CMLSP
 CON
 CIPP
 DIP
 FRP
 FRPM
 GRP
 HDPE
 ORP
 PB

Acrylonitrile-butadiene-styrene
 Asbestos Cement Pipe
 Brick
 Cement Mortar Lined Steel
 Concrete
 Cured-In-Place Pipe
 Ductile Iron (w/Protector 401)
 Fiberglass Reinforced Pipe
 Fiberglass Reinforced Polymer
 Glass Reinforced Pipe
 High Density Polyethylene
 Orangeburg Pipe
 Polybutylene

PB
 PCCP
 PE
 PFP
 PP
 PVC
 RCP
 RPM
 RTR
 SIPP
 SPR
 TC
 VCP

Lead Pipe
 Prestressed Concrete Cylinder Pipe
 Polyethylene
 Pitch Fiber Pipe
 Plastic Pipe
 Polyvinyl Chloride
 Reinforced Concrete Pipe
 Reinforced Plastic Mortar
 Reinforced Thermosetting Resin
 Spray-in-Place Pipe
 Spiral Wound Pipe
 Terracotta or Clay Pipe
 Vitrified Clay Pipe




PRE-REHABILITATION




**Asbestos
Cement Pipe**

Electro Scan FELL is unique in its ability to geometrically map the remaining wall, i.e. corrosion of ACP.

**Finding & Measuring
Pipe Corrosion
Using Electro Scan's
Patented Data
Analytics**




As demonstrated by independent benchmarks, since acoustic and transient pressure sensors are unable to provide detail geometric assessments of pipe walls, and therefore unable to estimate remaining pipe walls, Electro Scan represents a game changing solution to assess & prioritize ACP.



**High Density
Polyethylene
Pipe**


Poor mechanical or fused joints are the Achilles heel of HDPE, and not seen by CCTV cameras or heard by acoustic data loggers or sensors. But, found & quantified by FELL in accordance with ASTM F2550.



Evenly Spaced Defects Indicate Problem Joints.



What Electro Scan Finds Most?




**Prestressed
Concrete
Cylinder Pipe**

Electro Scan represents the only technology able to reliably & consistently find & measure leaks in GPM. While other devices may attempt to locate corroded wire mesh that may or may not indicate a weakness in the pipe wall, Low Voltage Conductivity represents a game-changing solution to provide unbiased leak locations & severity for each defect.



Superior to acoustic and electromagnetic sensors, Electro Scan's Low Voltage Conductivity detects leaks other technologies miss.

How PCCP Fails?




**Vitrified Clay
Pipe**

It doesn't matter whether you evaluate VCP from the outside or inside of a pipe, CCTV, Laser, LIDAR, Sonar, GPR, or Acoustic, are not able to detect or measure defect flows.



Electro Scan's FELL is the only technology, representing a Non-Destructive Test (NDT) able to follow a 90° pipe bend to locate a pathway for water to enter or exit a pipe.

By measuring the change in current and the amount of flow, the size of the opening can be computed and translated into an estimated GPM.



POST-REHABILITATION




**Cured-In-Place
Pipe**

CIPP liners may not be watertight and defects not seen by certified operators using CCTV cameras. As a result, ASTM F2550 should be added to CIPP specifications to ensure pipe quality & integrity.







Grout

FELL is now preferred over using traditional packers to test joints for water tightness, due to FELL's Non-Destructive Testing (NDT) of joints, laterals, and cracks.







**Spray-In-Place
Pipe**

Locking individual wraps is key to any successful Spiral Wrap Pipe project, with problems not identified by CCTV.




**Spiral Wrap
Pipe**

In contrast, Electro Scan FELL inspection can find defects to individual couplings.



PIPE WALL THICKNESS


Asbestos Cement (AC) Pipe Testing

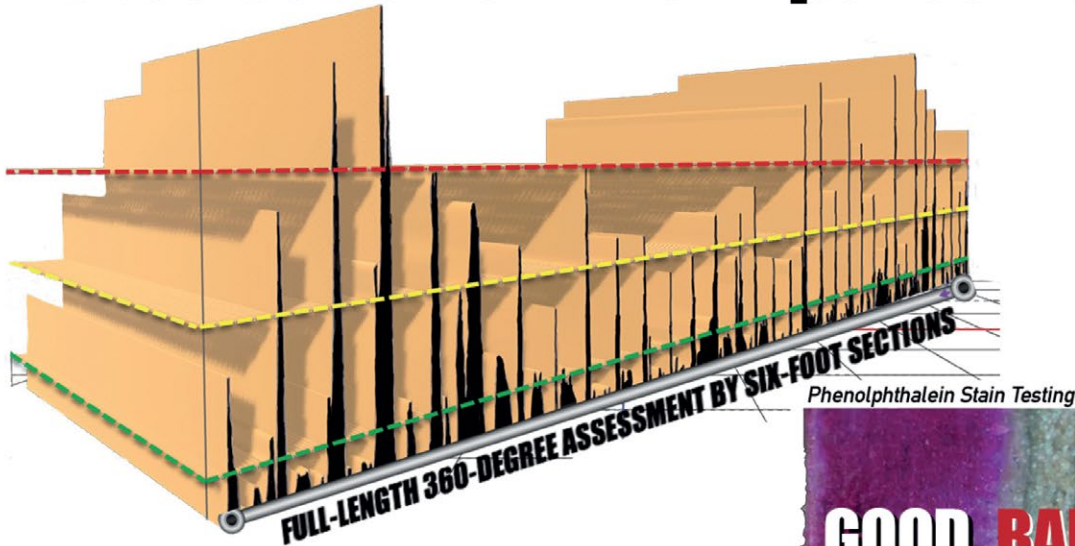


**Wall Thickness Measured By Electro Scan.
Missed By Acoustic Sensors & CCTV Cameras.**




WATER




WASTEWATER



Full-Length 360-Degree vs. Average for Entire Pipe

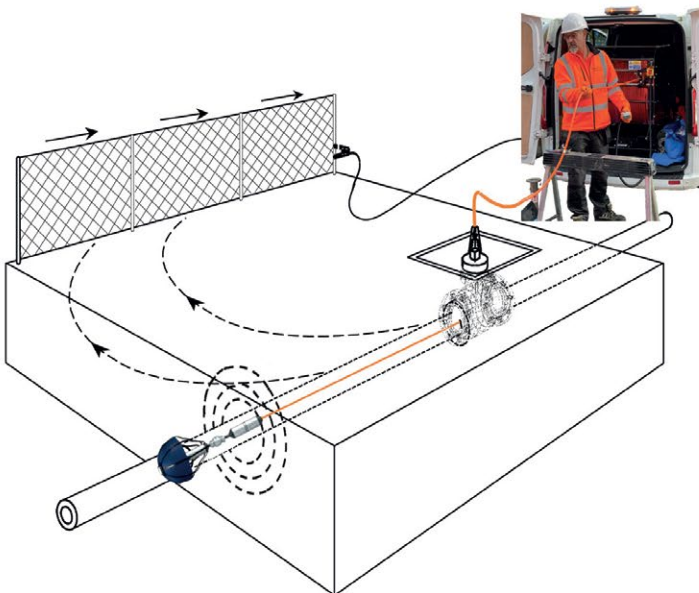

ACTIONABLE DATA

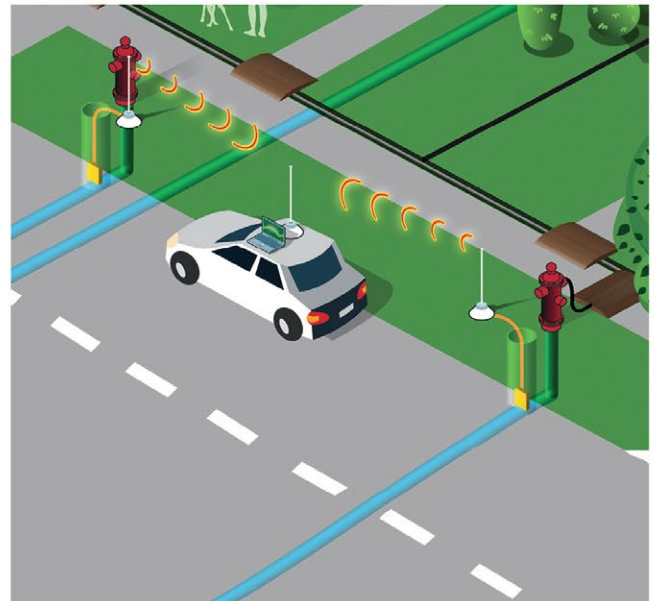

NO ACTIONABLE DATA





electro^{scan}inc.

ILLEGAL & LEAKING TAP CONNECTION ASSESSMENTS




ELECTRO SCAN USES PINPOINT ACCURACY AND AI-CCTV TO ACCURATELY IDENTIFY LEAKS AT TAPS v. PIPE WALLS

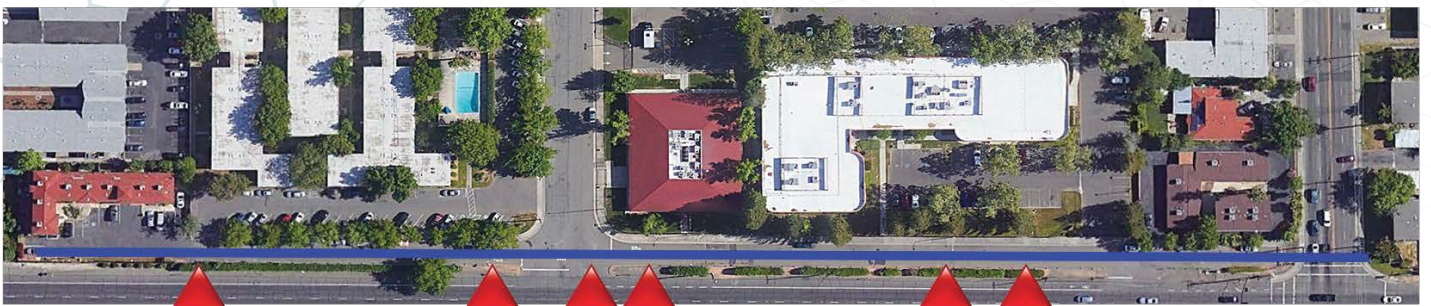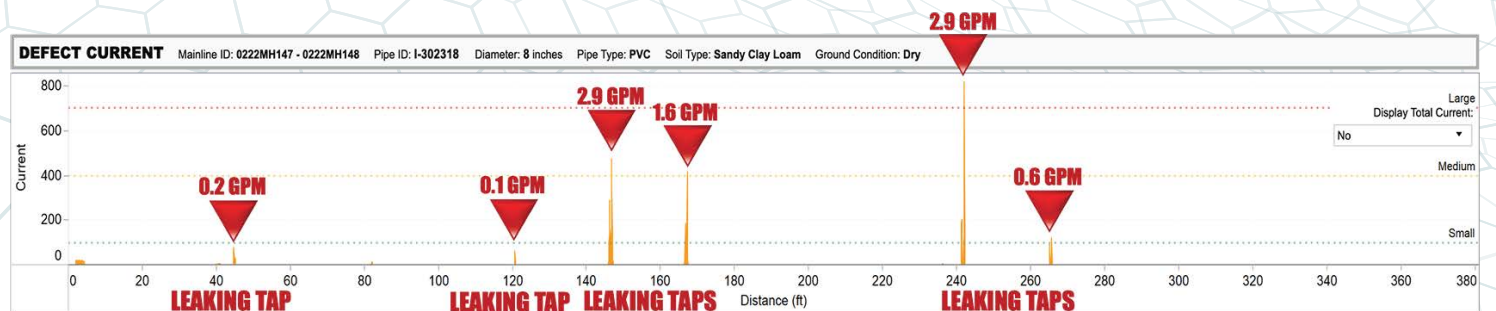

WATER LEAK DETECTION PRODUCTS

MULTI-SENSOR DELTA PROBE

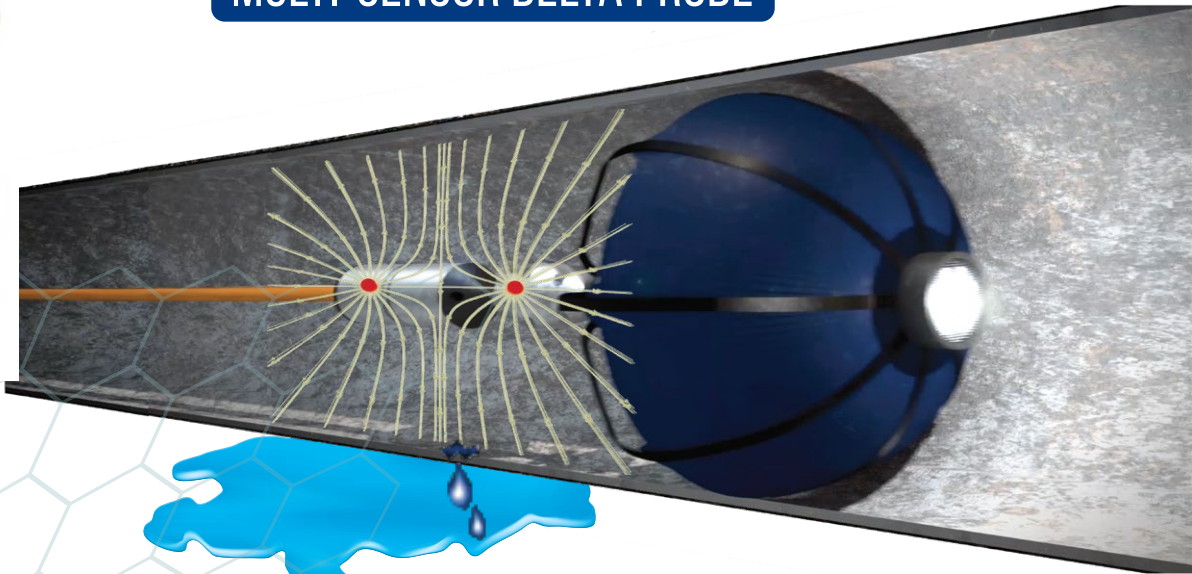

ACOUSTIC*




CONDUCTIVITY



CCTV

Condition	Performance
Features	Low Voltage Conductivity FELL, CCTV, Acoustic Hydrophone, Pressure Sensor
Pipe Diameters	8-60 inches (200-1500mm)
Pressure	ZERO to 12 bar (175 psi)
Temperatures	41-86 ^o F / 5-30 ^o C
Common Launch Points	Air Release Valves, Blow Off Valves, Gate Valves, Hot Taps, Hydrants, and Meters
Flow Rate	Min. Flow Rate for Hydrochute Propulsion is 0.3m/sec. Pull-Through able to handle NO FLOW conditions.
Pricing	Per Day or Per Meter Based on Project Size, Access Difficulty, Insertion Points, Diameters, and Traffic Control
Pipe Lengths Per Survey	1km Recommended for CCTV. Up to 2km with specialized equipment.
Average Production	1-2 Pipe Sections per Day

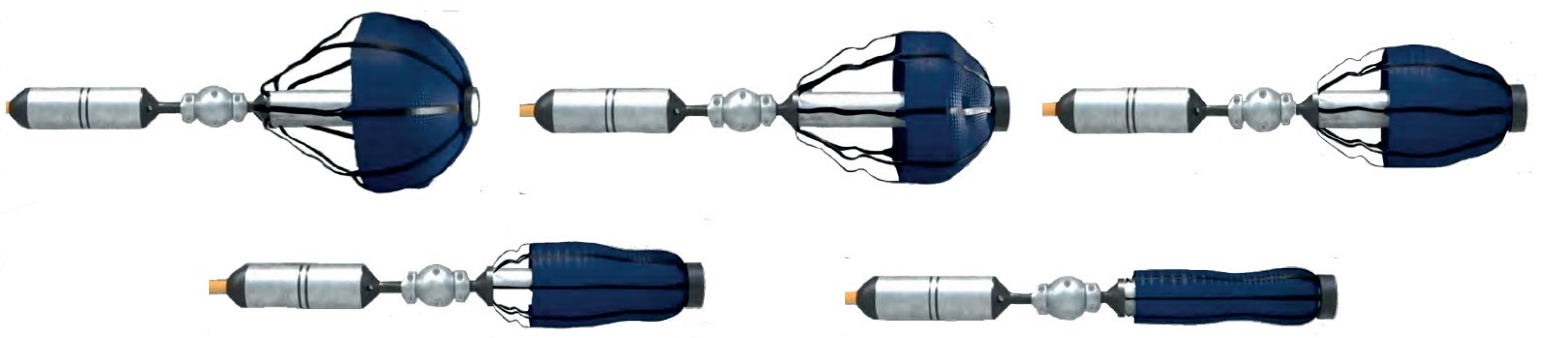

* Integrated Acoustic Sensor lets utilities compare results with Conductivity, revealing what they are “not” hearing.


MULTI-SENSOR DELTA PROBE




MULTI-SENSOR DELTA PROBE

ONLY AVAILABLE AS A SERVICE BY AUTHORIZED CONTRACTORS

HYDROCHUTE SET-UP

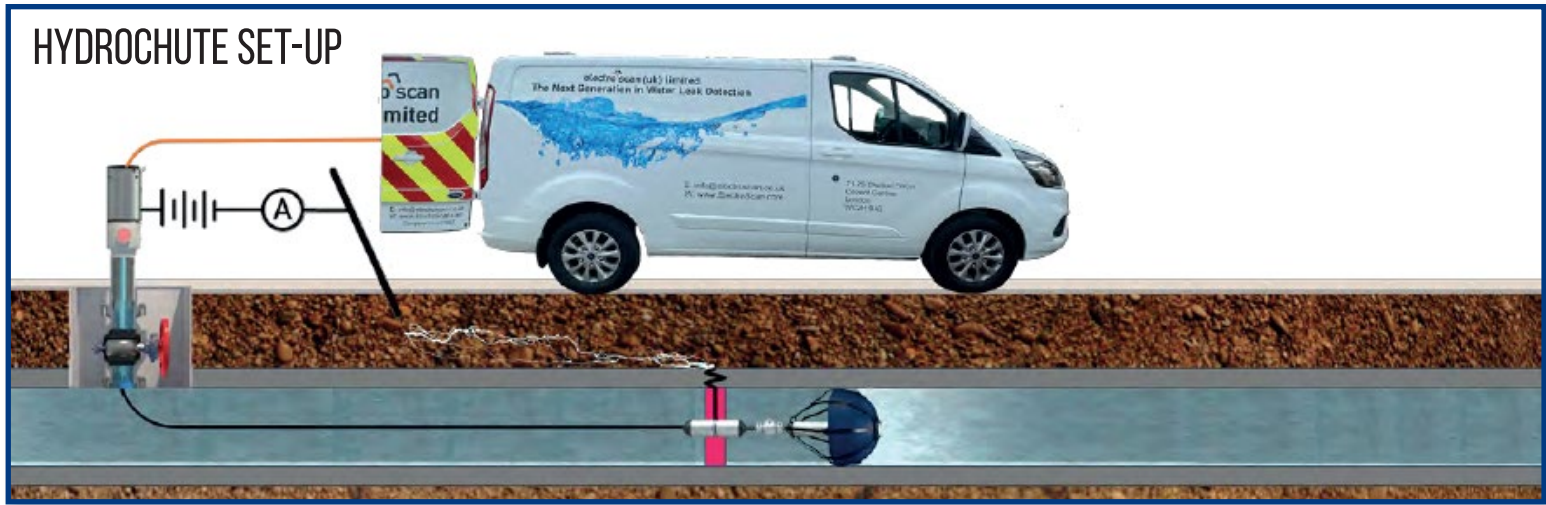

PULL-THROUGH SET-UP

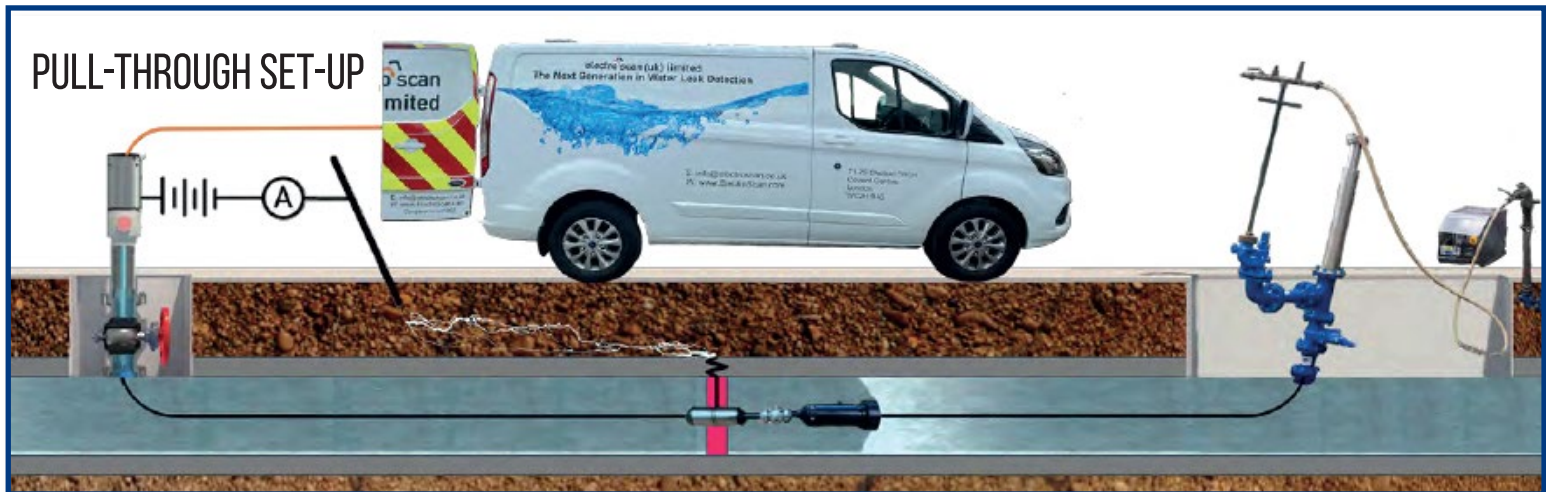


OVER 3,000 PRESSURIZED PIPE INSERTIONS

HYDROCHUTE SET-UP




PULL-THROUGH SET-UP

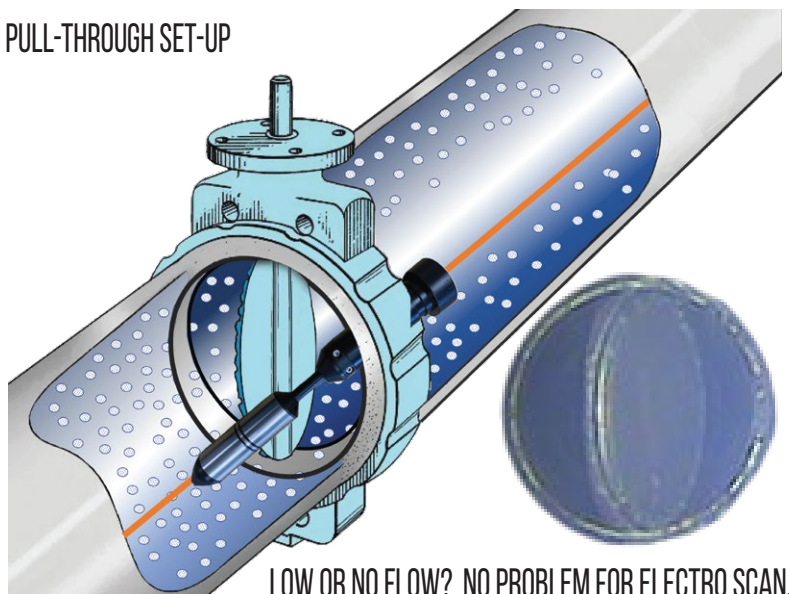

SAMPLE SURVEY DATA

Pipe	Description
Length	170m (560ft)
Diameter	600mm (24in)
Material	Cement Mortar Lined Ductile Iron
Pressure	130.5 psi (9 bar)
Test Date	17 September 2020
Prior Leak Testing	Hydrostatic Pressure Test (FAILED) Tethered Acoustic (NO LEAKS) Un-Tethered Sphere (NO LEAKS) Surface Data Logger (NO LEAKS) Listening Stick (NO LEAKS)

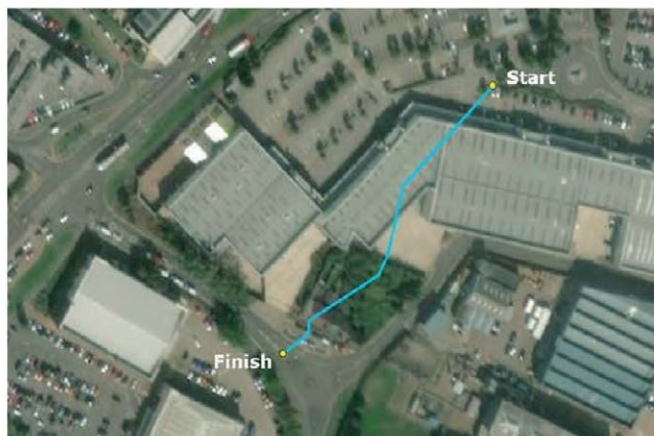

HANSEN
Hansen Analytics, LLC

Scans Export Support Log Out

criticalh2o


DEFECTS		DEFECT FLOW	
Large	2	Severe	1.5817
Medium	0	Moderate	0.6820
Small	13	Minor	0.1369
Pinhole	0	Total LPS	2.401
All Defects	15	LPD	207,403
		Severe %	65.89%
		Moderate %	28.41%
		Minor %	5.70%

Defects	Length	Total LPS	% of LPS	LPD
15	341	2.401	100%	207,410

Largest Defects Ranked By LPS



Defect Start	Defect End	Total LPS	% of LPS	LPD
162,883	162,980	0.471	19.61%	40,664
144,722	144,723	0.389	16.19%	33,578
92,231	92,281	0.364	15.16%	31,452
122,652	122,725	0.358	14.93%	30,962

Top Four Leaks	1.582	66%	136,656
-----------------------	--------------	------------	----------------

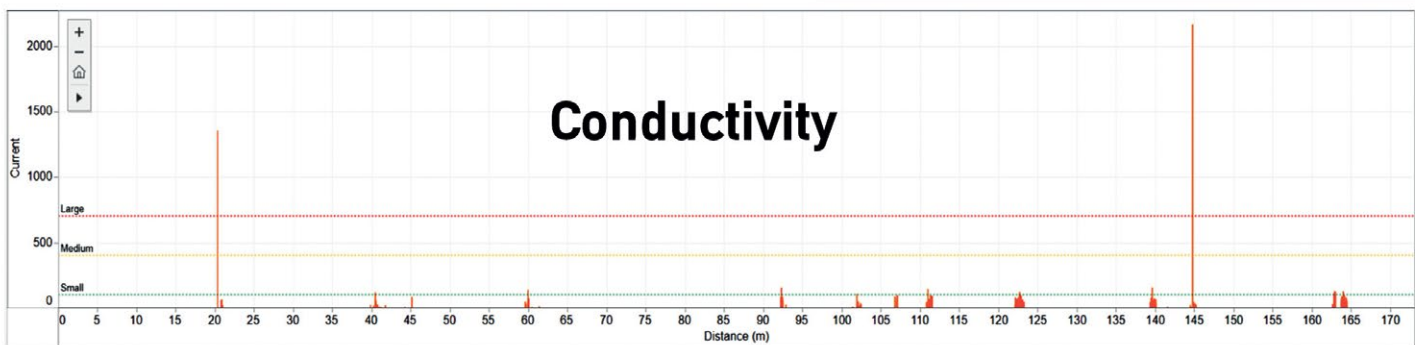

Acoustic - ONLY FALSE-POSITIVES

CCTV

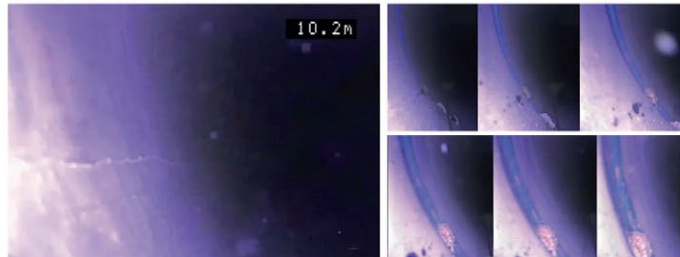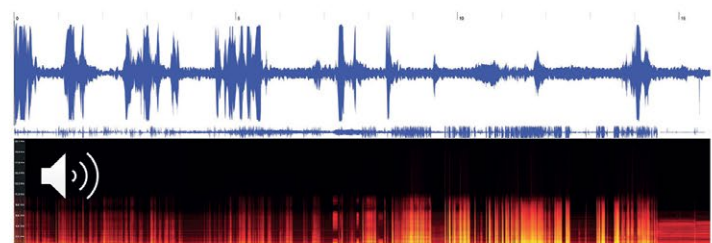

Data Partner




Smart Wireless Solution



MULTI-SENSOR TRIDENT PROBE

Pressurized Water Main Leak Detection.
Finding & Measuring Leaks in GPM or LPS.

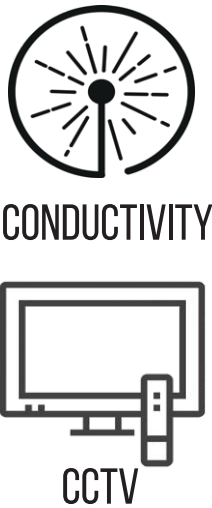

Condition	Performance
Probe Sensors	Low Voltage Conductivity FELL and CCTV
Pipe Diameters	4-10 inches (100-255mm)
Pressure	0 to 160 psi (11 bar)
Temperatures	5-30°C, 41-86°F
Flow Rate	Push Cable able to handle flow or no-flow conditions
Pricing	Per Day or Per Meter Based on Total Project Size
Launch Points	Hydrants, Air Release Valves, Blow Off Valves, Gate Valves, Hot Taps, Meters
Pipe Length Per Survey	Up to 400ft (120m) in either direction from access
Construction	High impact ABS & powder-coated, zinc-plated mild steel
Dimensions (Length x Width)	5 inches x 1.6 inches
Camera Features	Display: 10.1", 1280 x 800 HD color TFT Storage: Internal 128Gb, USB flash storage supported Power Options: Mains Input (100-240 VAC), DC Output (16 VDC) or Built-In Battery (4S2P) Focal Range: 10mm to ∞ Active Pixels: 768 x 492 (NTSC) / 765 x 582 (PAL) LED Luminance: ≥ 208 Lumens Resolution: ≥ 460 TVL

STANDARD OPERATING PROCEDURE

1 Hydrant, Hot Tap, or Valve


Hydrant Entry



Hot Tap



Actual Field Insertion

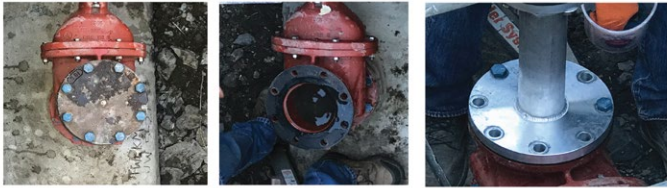

2 Flow Meter

Electro Scan first measures flow velocity and flow direction before any leak survey.



3 Chlorination & Cleaning



In addition to passing 'materials in contact' testing requirements, Electro Scan does not use any equipment except as designed for water networks, with all components cleaned & sanitized before its use in pressurized water mains.

4 Insertion Tube



Electro Scan's insertion tube is carefully lowered into place and secured before inserting its multi-sensor probe.

5 Probe Launch

After a final pre-insertion cleaning, the Electro Scan probe is lowered into the insertion tube with the pipe re-pressurized.




6 Push Reel

Utilizing a two-person team, Electro Scan's TRIDENT is spooled off the reel and then pushed through the insertion tube for initial deployment.



7 Data & Video Capture

Utilizing a two-person team, Electro Scan's TRIDENT is carefully 'spooled' into its insertion tube, then 'pushed' through the insertion tube for full pipe length deployment. Representing a breakthrough, data acquisition and video do not require operator interpretation.

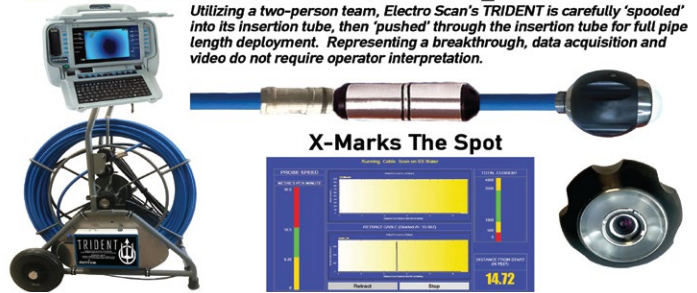


X-Marks The Spot




8 CCTV Push Forward Direction

Closed-Circuit Television (CCTV) video is automatically captured and streamed real-time so operators can navigate through valves and around obstructions.

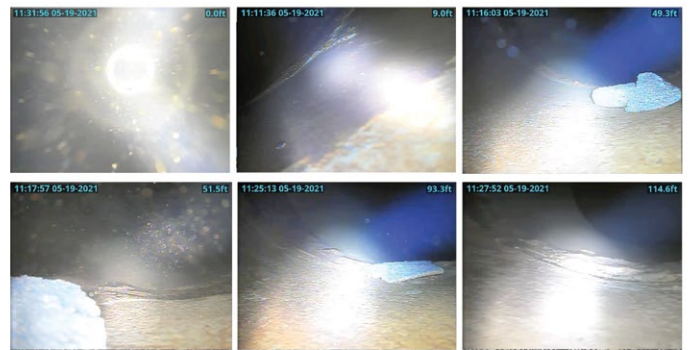


9 Electro Scan Pull Back Direction

Once a maximum distance is achieved (up to 400ft or 120m), then the operator begins recording Electro Scan data as the probe is pulled back through the pipe.

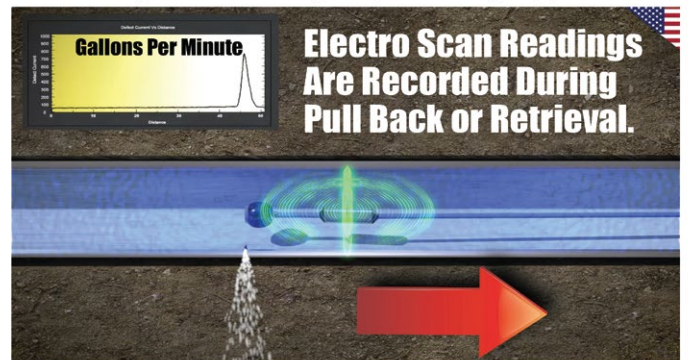

10 Probe Retrieval

After the probe has exited the water main, while still in the insertion tube, the gate valve may be closed to allow for the probe to be fully retrieved from the pipe.

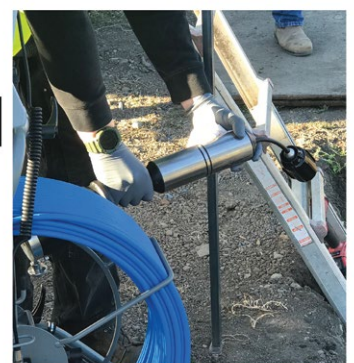





LINE LOCATION



DRAWBACK OF GROUND PENETRATING RADAR:
DIFFICULT TO LOCATE WATER MAINS

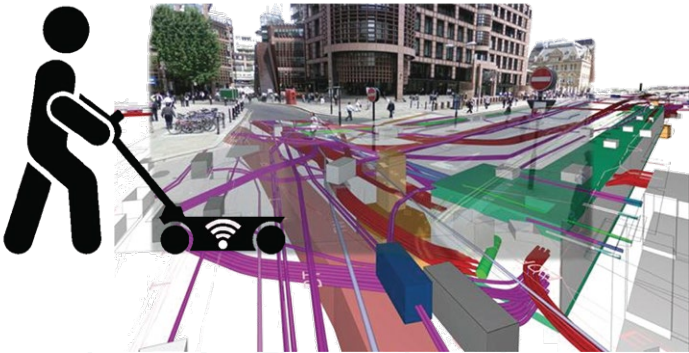

PRECISION SONDE LOCATOR

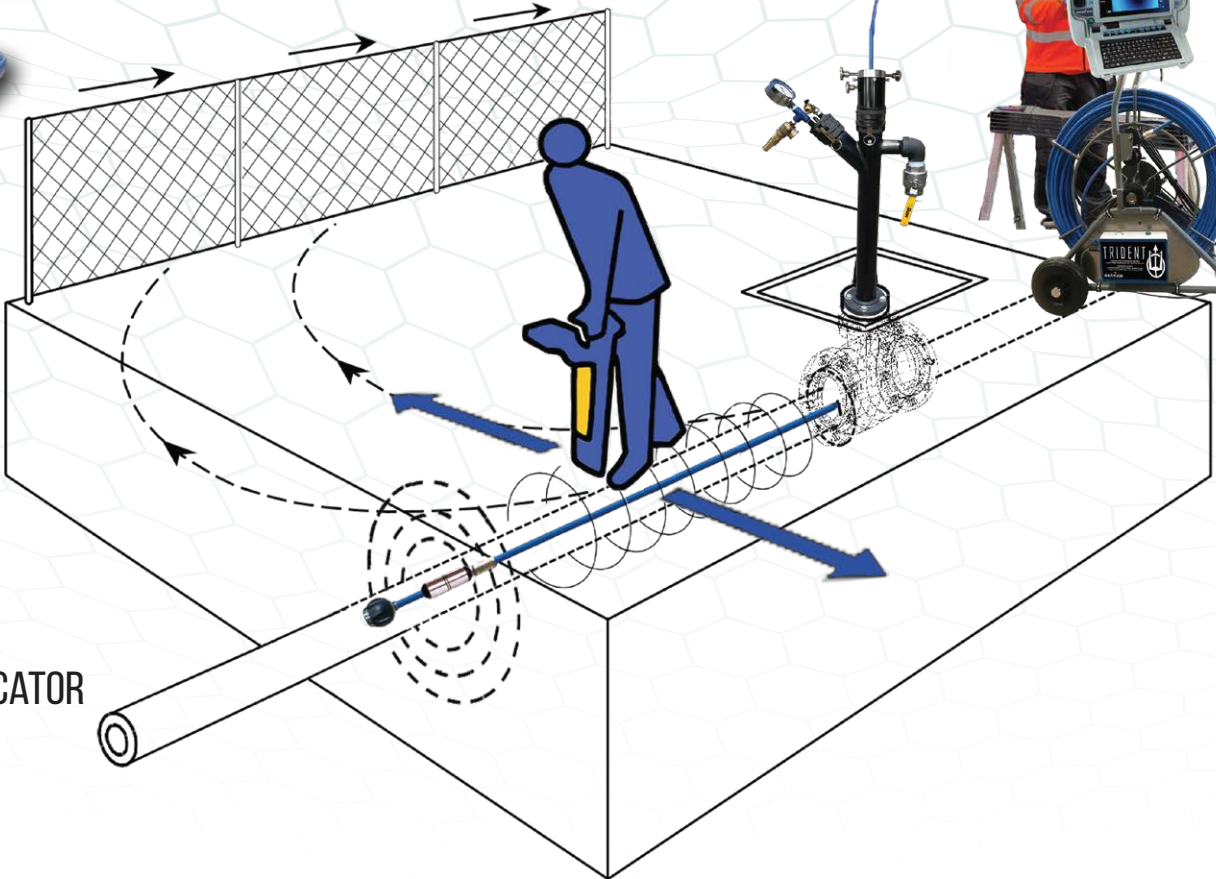

LOCATE LINES WITH THE TRIDENT PROBE'S BUILT-IN SONDE

NEW

WATER LEAK TRAINING CENTER




INSTRUCTION


HANDS-ON TRAINING

IN-PIPE NAVIGATION

AUTOMATIC DATA CAPTURE

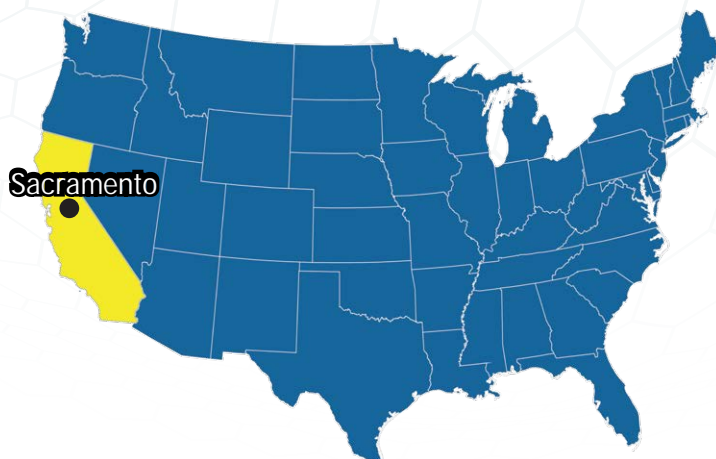

CRITICAL H2O CLOUD APPLICATION

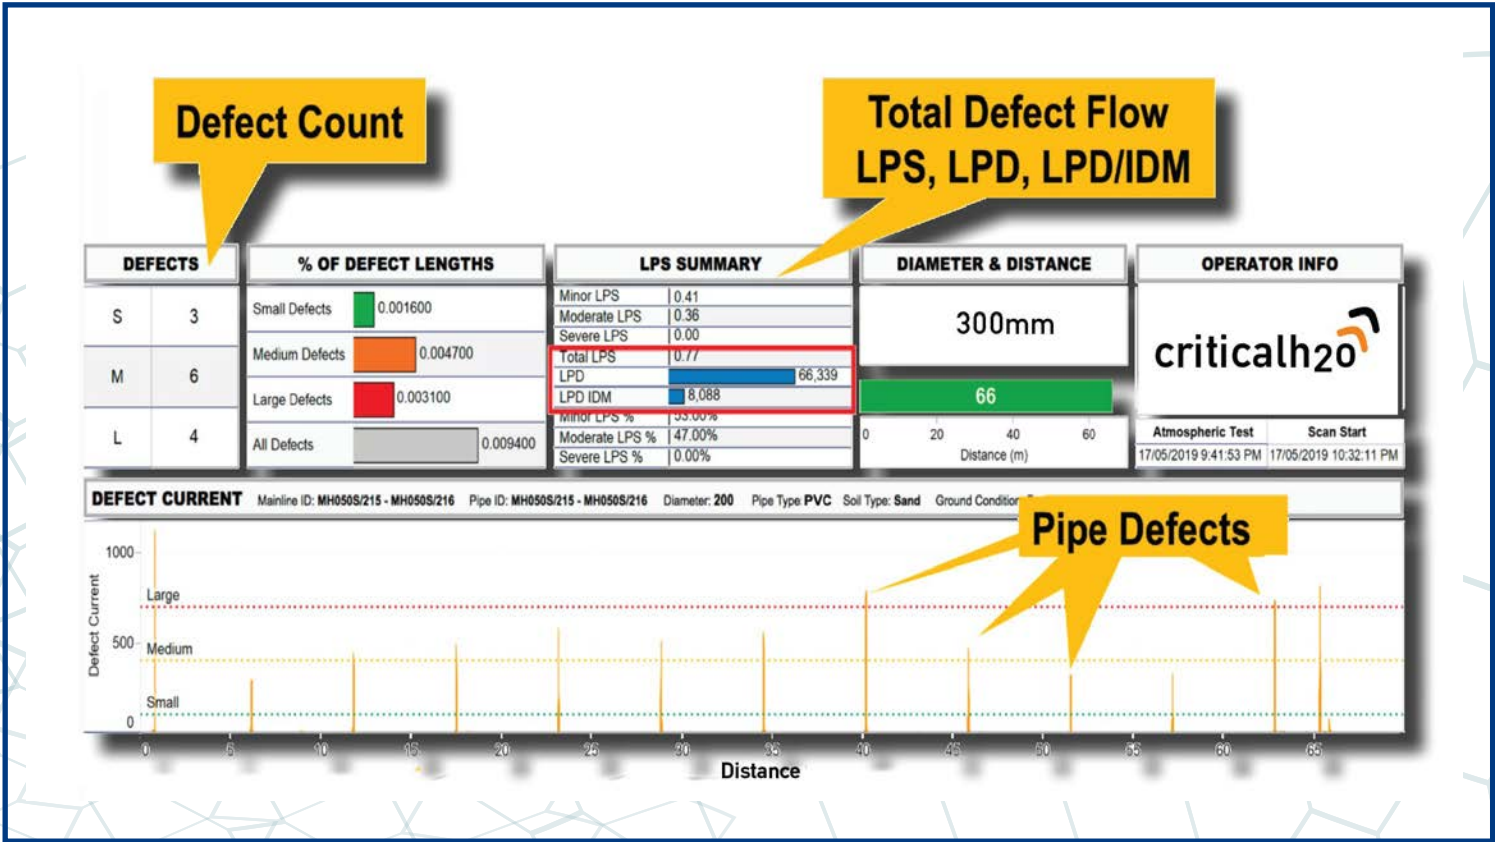

FIELD



OFFICE



Field Data
5-Minutes
or Less.

tableau
Innovyze

amazon
web services

SEWER INFILTRATION PRODUCTS

ES-600 CCTV TRUCK INTEGRATION ES-670, ES-660, ES-650, ES-400

Aries



Cues



IBAK



Ipek



Rausch



Custom



ES-670



ES-660




ES-650



ES-400 for Mechanical Reel



ES-400 for Push Rod Reel

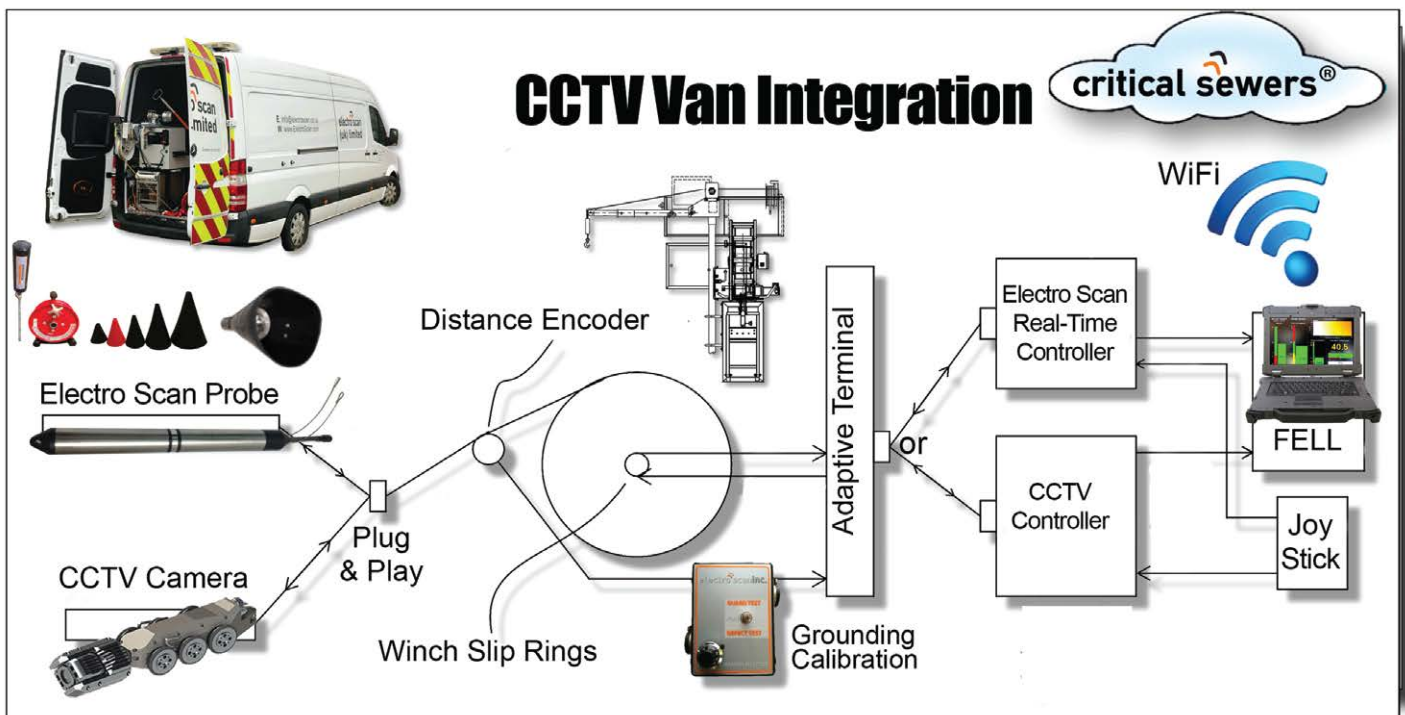


ES-600 STANDARD SPECIFICATIONS AND FEATURES

ES-600 Series	Conveyance	Combined Sewer & Storm Systems, Separated Gravity Mains, Gravity Water Mains, Force Mains, Siphons, and Stormwater Networks.	
	Required Flow	None. Dry, Partially, or Fully-Surcharged Flow. Aided by Jet Truck.	
	Pipes	Pipe Diameters	ES-670: Up to 72 inch (1800mm) ES-660: 6 to 60 inch (150 to 1500mm) ES-650: 6 to 30 inch (150 to 800mm) ES-400: 4 to 16 inch (100 to 400mm)
		Pipe Shape	Any, including Circular, Box, Egg-shaped, Oval, and Trapezoidal.
		Pipe Materials	Any Electrically Non-Conductive Pipe Walls, including Asbestos Cement, Brick, Cement Mortar Lined and Coated Steel, Cured-In-Place Pipe, Ductile Iron with Epoxy Coatings, Fiberglass Reinforced Pipe, High-Density Polyethylene Pipe, Prestressed Concrete Cylinder Pipe, Polyethylene, Polyvinyl Chloride, Reinforced Concrete, Vitrified Clay Pipe, etc.
	System Specification	Dimensions	ES-660 & ES-670 Length: 36 in (914mm); Diameter: 3 in (76mm)
		Scan Recording	Critical Sewers® Field Laptop PC, Wifi Connection to Critical Sewers® Cloud Application.
		Speed	45-60 ft/minute (15-20 meters/minute)
		Operating Temperature	20°F to 120°F (-7°C to 50°C)
		Power Supply	120VAC / 60Hz - or - 220VAC / 50Hz
		Range	1,500 ft (460m) range from single point of access.
		Current (max)	40 mA
		Electrical Array	Focused tri-electrode array
		Defect Flow Calculation	± 30% Accuracy measured in Gallons Per Minute (GPM) or Liters Per Second (LPS).
		Defect Location	ES-650 & ES-660 ±0.4 inches (1cm) ES-670 ±1 inch (2.5cm)
	Advantages	1. No manual coding required. 2. Finds & measures all leaks at cracks, joints, tap connections, and pipe wall. 3. Measures leaks in GPM (LPS). 4. No bypass pumping required for inspection. 5. Use in field rain or shine. 6. Recommended for all Pre- and Post-Rehabilitation. 7. Finds defects not seen by CCTV, such as inside joints. 8. Differentiates superficial cracks from cracks through pipe.	9. Repeatable test results, as verified by US, UK, German, Japanese, and Australian testing. 10. Finds & measures defects hidden by grease, silt, & encrustation. 11. Automatically evaluates 360° of pipe wall. 12. Determines water tightness of sewers & lateral connections. 13. Robust design has no moving parts. 14. Recommended by WRC, developers of NASSCO CCTV Codes. 15. Reports available in minutes, not hours, days, or weeks.
	Limitations	1. Does not provide a clock position of defect location inside the pipe, but location is accurate to within 0.4 inches (1cm). 2. Cannot scan pipes with obstructions or collapsed sections.	

ES-600 PORTABLE ES-670, ES-660, ES-650, & ES-400

PORTABLE SYSTEMS UTILIZE CUES K2 PORTABLE REEL OR EQUIVALENT

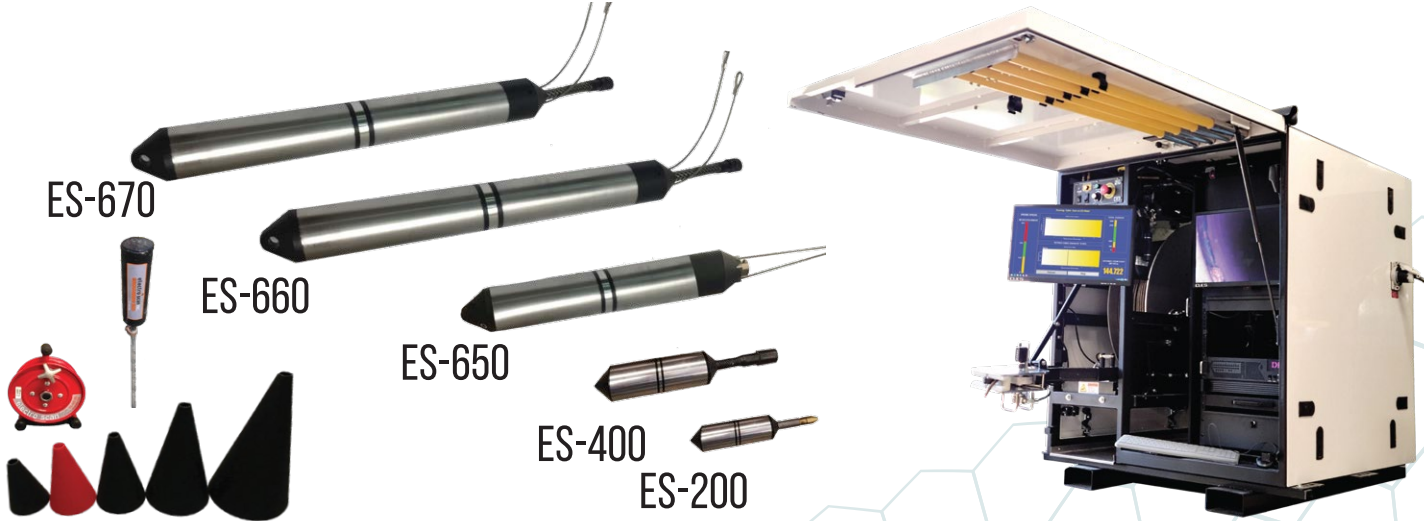

ES-600 SERIES PORTABLE*	PIPES	PIPE DIAMETERS	6 TO 72 INCH (150 TO 1800MM)
		RANGE	1,000 FT (305 M). DEPENDENT ON JET TRUCK HOSE LENGTH.
		PIPE SHAPE	ANY, INCLUDING CIRCULAR, BOX, EGG-SHAPED, OVAL, AND TRAPEZOIDAL.
		PIPE MATERIALS	ELECTRICALLY NON-CONDUCTIVE PIPE WALLS, INCLUDING ASBESTOS CEMENT, BRICK, CEMENT MORTAR LINED AND COATED STEEL, CURED-IN-PLACE PIPE, DUCTILE IRON WITH EPOXY COATINGS, FIBERGLASS REINFORCED PIPE, HIGH-DENSITY POLYETHYLENE PIPE, PRESTRESSED CONCRETE CYLINDER PIPE, POLYETHYLENE, POLYVINYL CHLORIDE, REINFORCED CONCRETE, VITRIFIED CLAY PIPE, ETC.
CONTINUED FROM PRIOR PAGE			

*FOR DIFFICULT TO ACCESS LOCATIONS AND EQUIPMENT PORTABILITY.



ES-400 PUSH ROD

ES-400	PIPES	PIPE DIAMETERS	4 TO 24 INCH (100 TO 600MM)
		PIPE SHAPE	ANY, INCLUDING CIRCULAR, BOX, EGG-SHAPED, OVAL, AND TRAPEZOIDAL.
		PIPE MATERIALS	ELECTRICALLY NON-CONDUCTIVE PIPE WALLS, INCLUDING ASBESTOS CEMENT, BRICK, CEMENT MORTAR LINED AND COATED STEEL, CURED-IN-PLACE PIPE, DUCTILE IRON WITH EPOXY COATINGS, FIBERGLASS REINFORCED PIPE, HIGH-DENSITY POLYETHYLENE PIPE, PRESTRESSED CONCRETE CYLINDER PIPE, POLYETHYLENE, POLYVINYL CHLORIDE, REINFORCED CONCRETE, VITRIFIED CLAY PIPE, ETC.
	SYSTEM SPECIFICATION	DIMENSIONS	LENGTH: 8 IN (203MM); DIAMETER: 2.2 IN (56MM)
		SCAN RECORDING	CRITICAL SEWERS® FIELD LAPTOP PC, WIFI CONNECTION TO CRITICAL SEWERS® CLOUD APPLICATION.
		SPEED	30 FT/MINUTE (10M/MINUTE)
		ENVIRONMENTAL	IP 67. ABLE TO WITHSTAND RAIN AND LOW PRESSURE WASH DOWN. 20 ⁰ F TO 120 ⁰ F (-7 ⁰ C TO 50 ⁰ C)
		POWER SUPPLY	12V RECHARGEABLE EXTERNAL BATTERY PACK -OR- 12V DC EXTERNAL POWER SUPPLY.
		REEL	SPOOL DIAMETER 39 INCHES, L32 INCHES, W20 INCHES, H38 INCHES L81CM, W51CM, H96CM. LENGTH: 400 FT (120 M)
		CURRENT (MAX)	40 MA
		ELECTRICAL ARRAY	FOCUSED TRI-ELECTRODE ARRAY
		DEFECT FLOW CALCULATION	±30% ACCURACY MEASURED IN GALLONS PER MINUTE (GPM) OR LITERS PER SECOND (LPS)
		DEFECT LOCATION	±0.4 INCHES (1CM)
		WEIGHT	PROBE: 2.95 LB (1.34KG) TOTAL WEIGHT 80LBS (36KG)



ES-200 PUSH ROD

ES-200	PIPES	PIPE DIAMETERS	3 TO 8 INCH (76 TO 200MM)
		PIPE SHAPE	ANY, INCLUDING CIRCULAR, BOX, EGG-SHAPED, OVAL, AND TRAPEZOIDAL.
		PIPE MATERIALS	ELECTRICALLY NON-CONDUCTIVE PIPE WALLS, INCLUDING ASBESTOS CEMENT, BRICK, CEMENT MORTAR LINED AND COATED STEEL, CURED-IN-PLACE PIPE, DUCTILE IRON WITH EPOXY COATINGS, FIBERGLASS REINFORCED PIPE, HIGH-DENSITY POLYETHYLENE PIPE, PRESTRESSED CONCRETE CYLINDER PIPE, POLYETHYLENE, POLYVINYL CHLORIDE, REINFORCED CONCRETE, VITRIFIED CLAY PIPE, ETC.
	SYSTEM SPECIFICATION	DIMENSIONS	LENGTH: 6.5 INCHES (165MM); DIAMETER: 1.57 INCHES (39.88MM)
		SCAN RECORDING	CRITICAL SEWERS® FIELD LAPTOP PC, WIFI CONNECTION TO CRITICAL SEWERS® CLOUD APPLICATION.
		SPEED	30 FT/MINUTE (10M/MINUTE)
		ENVIRONMENTAL	IP 67. ABLE TO WITHSTAND RAIN AND LOW PRESSURE WASH DOWN. 20 ⁰ F TO 120 ⁰ F (-7 ⁰ C TO 50 ⁰ C)
		POWER SUPPLY	12V RECHARGEABLE EXTERNAL BATTERY PACK -OR- 12V DC EXTERNAL POWER SUPPLY.
		REEL	SPOOL DIAMETER 26 INCHES, L26 INCHES, W12 INCHES, H32 INCHES L66CM, W30CM, H81CM. LENGTH: 400 FT (120 M)
		CURRENT (MAX)	40 MA
		ELECTRICAL ARRAY	FOCUSED TRI-ELECTRODE ARRAY
		DEFECT FLOW CALCULATION	±30% ACCURACY MEASURED IN GALLONS PER MINUTE (GPM) OR LITERS PER SECOND (LPS)
		DEFECT LOCATION	±0.4 INCHES (1CM)
		WEIGHT	PROBE: 1.1 LB (.50KG) 50LBS (23KG)



CRITICAL SEWERS® CLOUD APPLICATION

critical sewer®

HomeMy Electro ScanEdit ScansExportSupportLog Out

Select & Minus

☒ CSB

☒ CSU

☒ CT

☒ DIP

☒ Epoxy DIP

☒ EW

☒ FF

☒ FRP

☒ GRC

☒ GRP

☒ HDPE

☒ HP

☒ MDPE

☒ NRCP

☒ OB

☒ PCCP

☒ PE

☒ PF

☒ PLP

☒ PP

☒ PVC

☒ RCB

☒ RCP

☒ RPM

(All)

Diameter: (All)

GPM: 0 15,229

Order By: Large Defects

Scans	Distance	Pinhole	Small	Medium	Large	Total Defects	GPM	GPD	GPD/IDM
13,679	2,461,227	19,542	227,599	44,108	54,727	345,976	412,822.75	594,464,759	6,756,695,936

Date	Mainline ID	Pipe ID	Pipe Type	Diameter	Distance (ft)	Pinhole	Small	Medium	Large	Total Defects	GPM	GPD	GPD/IDM
8/5/2020	B05-046 - B05-074	B05-046 - B05-074	VCP	6	645	0	78	56	237	371	983.46	1,416,182	1,932,903
1/4/2019	B05-046 - B05-074	B05-046 - B05-074	VCP	6	652		49	61	229	339	839.16	1,208,390	1,631,561
9/16/2019	C04-294 - C04-145	C04-294 - C04-145	VCP	6	545	0	59	37	214	310	872.61	1,256,558	2,029,170
6/22/2016	85-002-11 - 85-002-10	85-002-11 - 85-002-10	VCP	8	535		16	16	201	233	901.17	1,297,685	1,602,307
1/7/2019	C04-092 - C04-093	C04-092 - C04-093	VCP	6	445		33	13	199	245	759.33	1,093,435	2,160,563
8/4/2020	C04-092 - C04-093	C04-092 - C04-093	VCP	6	509	0	59	3	197	259	1,532.90	2,207,376	3,817,007
8/22/2019	C04-094 - C04-093	C04-094 - C04-093	VCP	6	445	0	26	6	197	229	1,030.82	1,484,381	2,938,459
11/1/2016	HH0637 - HH0636	HH0637 - HH0636	VCP	12	113		4	1	195	200	1,943.35	2,798,424	4,922,014
12/13/2018	C05-261 - C05-229	C05-261 - C05-229	VCP	6	439		43	18	191	252	779.20	1,122,048	2,249,346
12/5/2018	C04-294 - C04-145	C04-294 - C04-145	VCP	6	545		50	55	191	296	729.32	1,050,221	1,696,566
1/7/2019	C04-094 - C04-093	C04-094 - C04-093	VCP	6	442		22	11	189	222	778.05	1,120,392	2,232,842
5/2/2019	Pit A - Exit Pit A	HDPE	PE	8	387		95	155	188	438	513.93	740,059	1,261,920
8/5/2020	C04-092 - C04-093	C04-092 - C04-093	VCP	6	445	0	17	19	187	223	636.36	916,358	1,811,163
8/5/2020	C04-083	C04-084 - C04-083	VCP	6	449	0	24	7	186	217	968.58	1,394,755	2,735,359
9/16/2019	C04-180	C04-329 - C04-180	VCP	6	386	0	8	12	179		839.87	1,209,413	2,759,739
8/5/2020	85-002-10 - 85-201-09		VCP	8	534		30	44	165		756.68	1,089,619	1,347,500

UndoRedo


SignalShareDownloadFull Screen



PLUMBER'S

WATER & SEWER LEAK DETECTION


ES-25 & ES-50 PUSH RODS FOR WATER

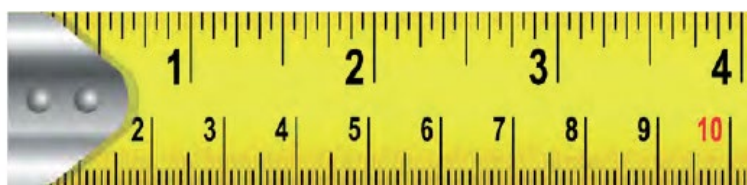

ES-25 & ES-50 PROBES


PIPE DIAMETERS:
1-2 INCHES (25-50MM) | 2-4 INCHES (50-100MM)

APPLICATIONS:
LEAK DETECTION FOR RESIDENTIAL & COMMERCIAL PLUMBING,
AND INDUSTRIAL APPLICATION, HYDRANT ENTRY, HIGHLY TUBERCULATED
WATER MAINS TO MINIMIZE DISRUPTION, ASSESSMENT OF VERTICAL PIPES,
INCLUDING CIPP WATERTIGHTNESS TESTING.

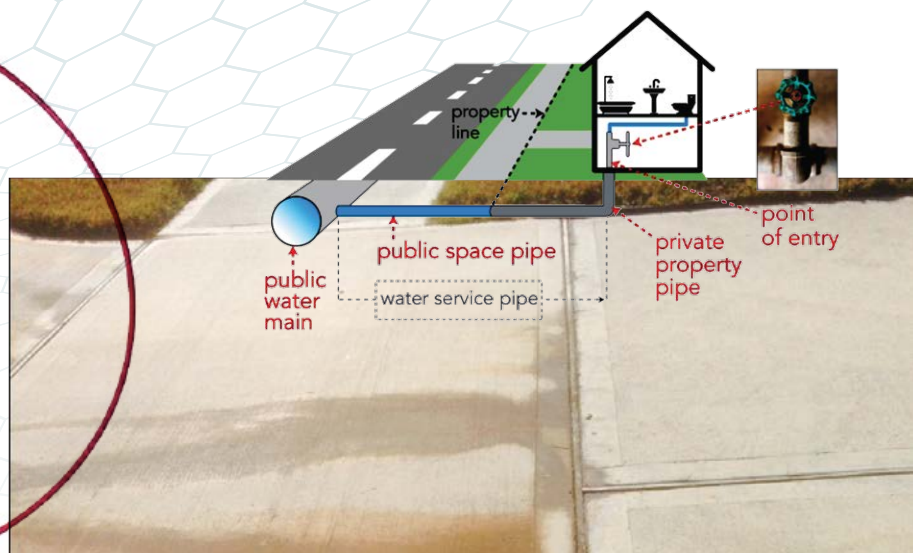

HIDDEN LEAKAGE UNDER DRIVEWAY

SWORDFISH COMBINED LEAD AND LEAK DETECTION

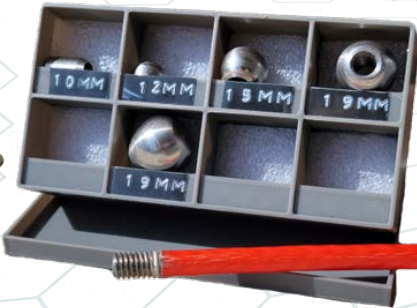

FEATURES	LEAD DETECTION AND LEAK LOCATION
PRESSURES	ZERO TO 10 BAR (145 PSI)
COMMON LAUNCH POINTS	METERS, CURB BOXES, AND MORE
PIPE DIAMETERS	1/2" TO 3" (13MM TO 80MM)
SURVEY LENGTH	UP TO 80 FT (25M)





Circled numbers represent possible changes in pipe materials that may or may not be a source for lead to leach into domestic drinking water pipelines.

Additional lead testing confirmation


ES-200 & ES-400 PUSH RODS FOR SEWER

Top 3 Causes of Flooding

1. Wet-Weather Infiltration into Sewers
2. Pipe Blockages
3. Equipment Failure

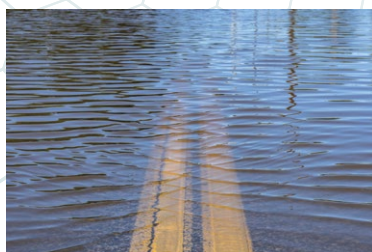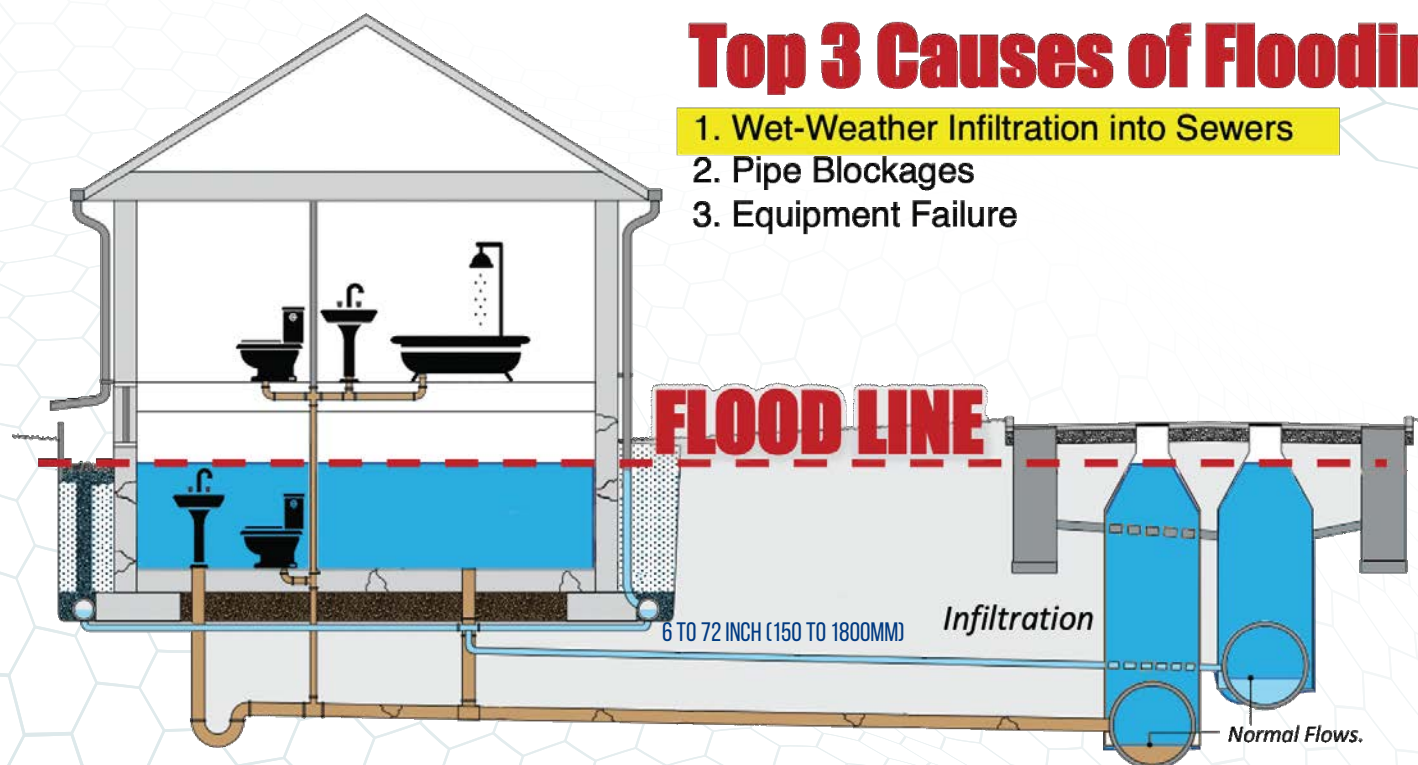

Focused Electrode Leak Location (FELL) is an "unambiguous way to detect leaks in service laterals."

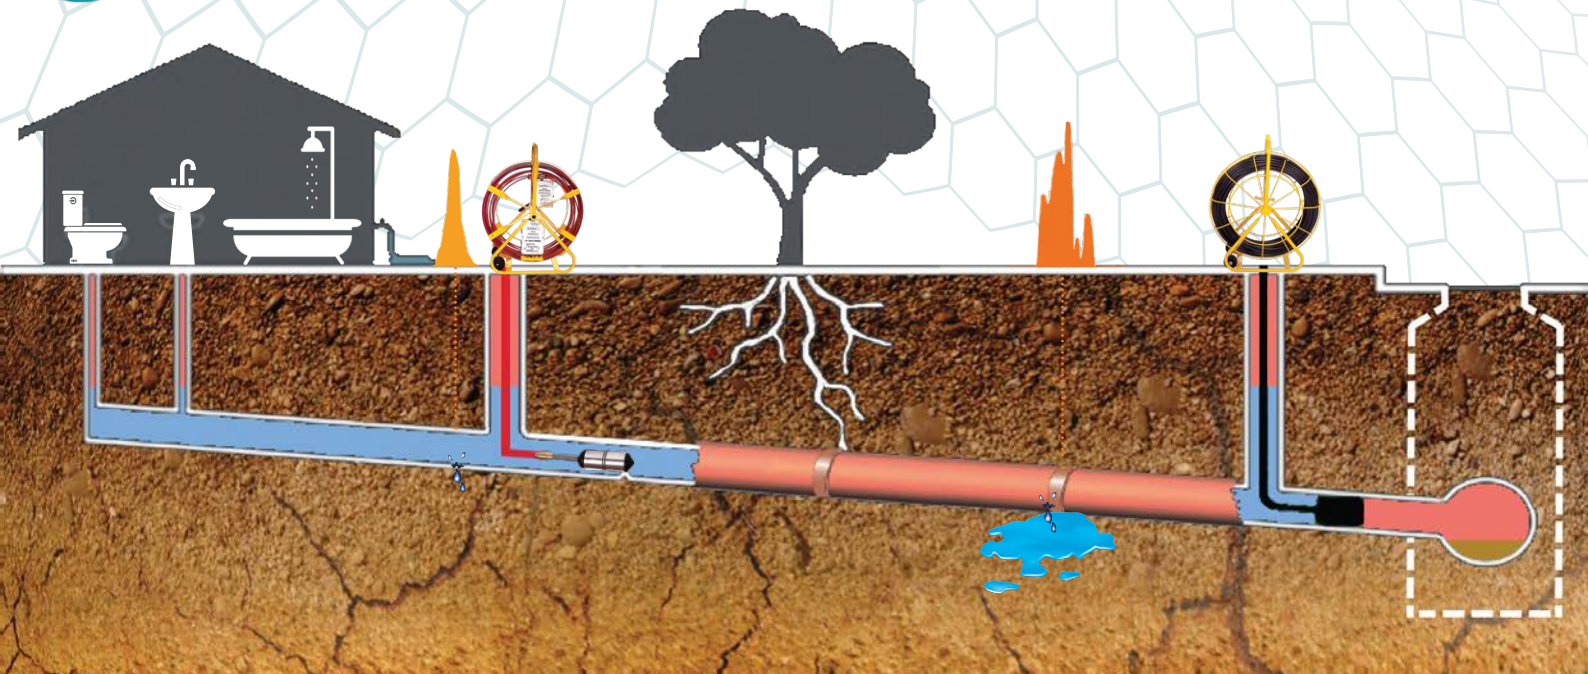

CONFIRM SATELLITE 'POINTS OF INTEREST'

<div>Satellite/Drones</div>			<div>Electro Scan</div>											
HITS		MISSES	PIPE-SPECIFIC LEAK QUANTIFICATION											
Matching Severe Leaks	Matching Moderate Leaks	Matching Small Leaks	Missed Small Leaks	Missed Moderate Leaks	Missed Severe Leaks	Pipe Material	Pipe Diameter	GPM	Pipe Length	Number of Leaks				
										Pinhole	Small	Medium	Large	Total

Satellite Imagery & Aerial Drone Water Leak Screening Technologies
APEM, Orbital Eye, Orbital Sidekick, Parrot, RezaTec, Satelitycs, Utilis, WADI, Workswell

Don't Let 'MISSED' Leaks Using
Acoustic Sensors Turn You 'Off'
to Using Satellites or Drones
to Screen for Leaks!

Use Electro Scan as Your 'Boots-on-the-Ground'
To Locate With 1cm Accuracy & Severity in GPM.

electro^{scan}inc.

SERVICES

CONTRACT SERVICES

Direct Services By Electro Scan's
International Field Teams

TECHNOLOGY LICENSING

Licensing to 3rd Party
Authorized Contractors Utilizing
Electro Scan Certified Equipment

SPECIFIC PRICING
AVAILABLE UPON
REQUEST

UTILITY SALES & SOFTWARE CLOUD LICENSING



ACCURATE, FAST, REPEATABLE



CONTACTS

Worldwide

Contact: Paul Pasko, VP, International Business Development
Email: paul@electroscan.com Mobile: +1 612 201 1867

EU & UK

Contact: Brad Weston, Director, Electro Scan (UK) Limited
Email: brad@electroscan.com Mobile: +44 7739 358611

Asia Pacific

Contact: Chuck Hansen, Founder and Chairman
Email: chuck@electroscan.com Mobile: +1 916 275 2921

North America

Contact: Mike App, Executive Vice President
Email: mike@electroscan.com Mobile: +1 917 817 0090

Canada

Contact: Luc Lupien, Director of Business Development, Canada
Email: luc@electroscan.com Mobile: +1 450 760 1240

Product Development

Contact: Mackenzie App, VP, Product Development Sewer
Email: mackenzie@electroscan.com Mobile: +1 315 857 8845

Contact: Matt Campos, VP, Product Development Pressurized
Email: matt@electroscan.com Mobile: +1 916 879 0686

electroscaninc.

1745 Markston Road Sacramento,
California 95825 Tel: +1 916 779 0660
Email: info@electroscan.com
Website: www.electroscan.com

